



FireSpy® Tracker 2000

Fire Alarm Control Panel

Harrington Signal Inc.
 2519 4th Avenue, Moline, Illinois 61265
 P.O. Box 590, Moline, Illinois 61266-0590
 Phone: (800) 577-5758 Local: (309) 762-0731 Fax: (309) 762-8215
 Internet: www.harringtonfire.com



Description

The FireSpy® Tracker 2000 Fire Alarm Control Panel (FACP) is designed for small to medium commercial, institutional and industrial applications.

The T2000 comes with 2 addressable SLC loops, and cannot be expanded. Each SLC loop supports up to 126 devices which may be either detectors or modules with a total of 252 devices per panel.

The T2000 panels provides auto programming by the keypad or through a PC for onsite and remote programming, simple to install, operate and configure.

The T2000 comes with 4 NAC's 3 Amps max per NAC, 7 Amps total.

*The FACP also features drift compensation through the smoke detector devices.

All Tracker panels come in a red enclosure with a Cat 15 lock and key and space to mount 12 AH Batteries.

Features


- Addressable and Conventional
- Analog intelligent
- Auto programming
- Detectors provide drift compensation¹
- 126 devices per SLC loop (max 252 devices)
- 3 Remote annunciators per panel
- Auto programming
- Optional remote trouble and programming capability (accessory only)
- Day/Night sensitivity
- Holiday schedule setting up to 20 different days per year
- Flash LED options
- Alarm Verification²
- RS-485 bus provides communication to system (accessory)
- Built-in RS-232 interface for programming via PC
- Simulator available to simulate full loops
- System supports 250 groups
- Power Supply has 4 Levels of power charging current
- Expandable to 60 Conventional Zones



- Normal walk test
- Silent walk test
- 4 NAC's, 3 Amps max per NAC, 7 Amps total
- NAC circuit may be used as power circuit or power re-settable circuit or input zone or Gentex Sync Protocol³

Ordering Information

Model Number	Part Number	Description
T2000-2FACP	T2000-2FACP	2 Loop Addressable Fire Alarm Control Panel
T2000-2FACP-D	T2000-2FACP-D	2 Loop Addressable Fire Alarm Control Panel w/Dialer
T8000-RAN	T8000-RAN	Annunciator without Cabinet
T8000-ANN	T8000-ANN	Annunciator with Cabinet
T8000-RC	T8000-RC	Relay Module
T2000-MBC-LC	T2000-MBC-LC	Motherboard with 2 SLC Addressable Circuits and Chassis Power Supply
T8000-10CM	T8000-10CM	Conventional Module
T8000-EXP	T8000-EXP	Expander Cabinet
T-UDACT	T-UDACT	Universal Dialer
T8000-RCCBL	T8000-RCCBL	Relay Cable
TCable-Null	TCable-Null	Program Cable

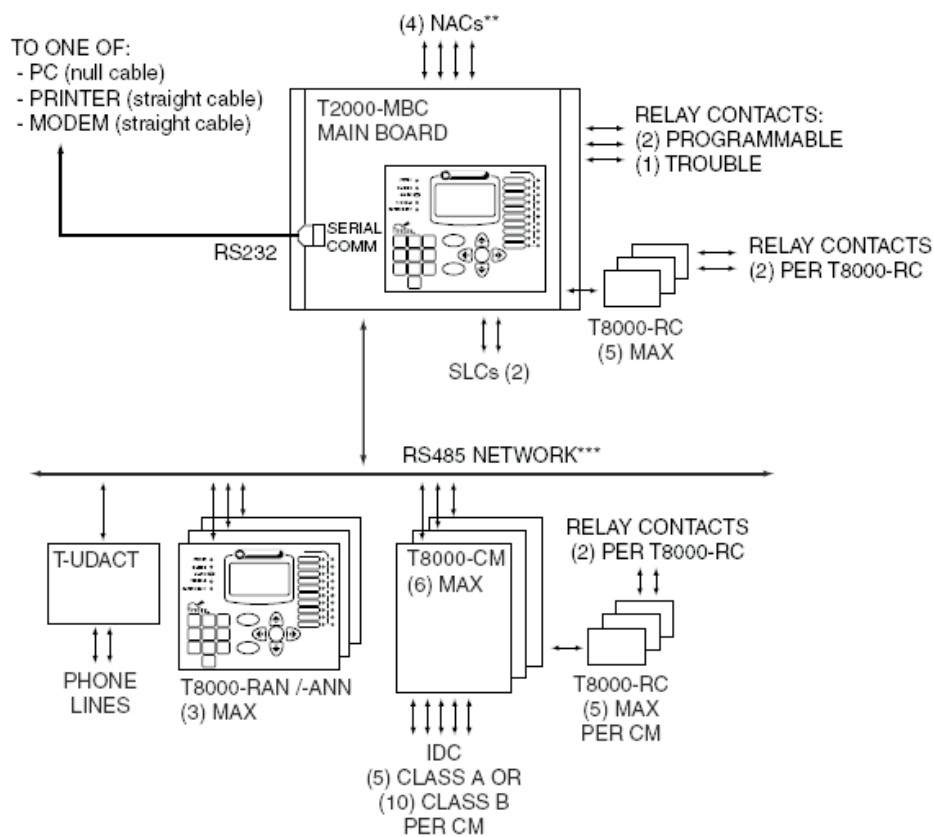

** MAY BE INDIVIDUALLY CONFIGURED AS NAC, AUX POWER, OR INPUT
*** DEVICES MAY BE INSTALLED UP TO 6000 FEET FROM T2000-MBC

290-0128

- ¹ XP95 Series Alarm Verification
² IS Series only for Drift Compensation
³ 1 ½ Amp Max. For Gentex Sync mode

Engineering Specifications

The panel shall be Harrington FireSpy® series Tracker 2000, a modular type design. The basic addressable panel have 2 loops. The basic system shall be capable of drift compensation, auto programming, day/night sensitivity, off site programming and trouble shooting (accessory only). The Tracker 2000 may have up to 3 Remote annunciators per panel. The Tracker 2000 shall be able to program up to 250 groups and have a holiday schedule feature with up to 20 days per year.

NOTICE: The information contained in this document is intended only as a summary and is subject to change without notice. The devices described in this document have specific instruction sheets which cover various technical, limitation and liability information. Copies of these instruction sheets and the General Product Warning and Limitations Document, which also contains important information are provided with the product and are available from Harrington Signal Inc. Fire Alarm. Information contained in these documents should be consulted before specifying or using the product. For further information or assistance concerning particular problems contact Harrington Signal Inc. Harrington Signal Inc. Fire Alarm reserves the right to change specifications without notice.